


VDC Integrator Series 8x4mm Speaker

Speaker Cable 8×4.0mm² Stranded Bare Copper, LSZH Ins, LSZH Sheath

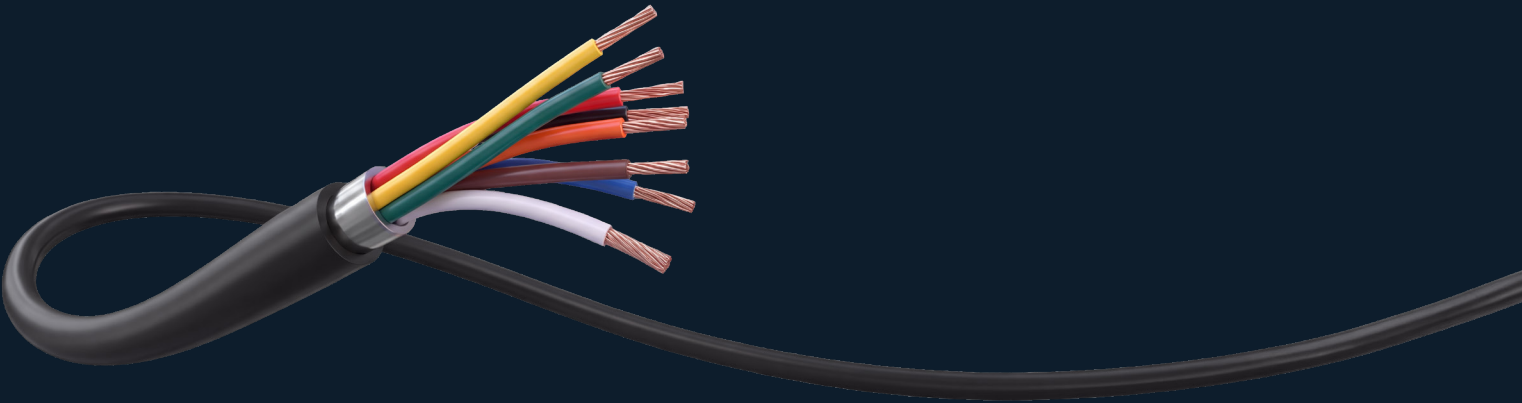

General

Inner Conductor	4.0mm ² Stranded Bare Copper IEC60228 Class 5
Insulation	LSZH
Cores	8
Insulation Color	Red, Black, Green, White, Blue, Yellow, Brown, Grey
Wrapping Tape	PET
Jacket Colour	Black
Outer Jacket	LSZH (Full extrusion)

Electrical Characteristics

Rated Voltage	600V
Conductor DCR	8.0 Ohm/Km Max
Rated Temperature	-30°C +70°C
UV resistance	ISO 4892-3

Dimensions (mm)

Conductor Diameter	52x0.29±0.01
Insulation Diameter	Brown 4.3±0.1, Others 3.6±0.1
Jacket Diameter	14.3

Standard and Compliance

RoHS 3 (EU 2015/863)	Compliant
REACH	Compliant
Flammability	EN 60332-1-2
Smoke Density	EN 61034-2
Halogen Acid Gas Test	IEC 60754-1
Corrosive Gases Test	IEC 60754-2
Reaction to Fire - Bundle Flame Test	EN 50399
CPR Classification	B2ca s1a,d0,a1